LINE	"A"	"B"	"C"	"T"	"W"	"L"	WT #	"R"
01	10"	1'-5 11/16"	10 3/8"	1/4"	2 1/2"	3'-1 1/16"	6.5	1/4"
02	10"	1'-5 15/16"	10 5/8"	1/4"	2 1/2"	3'-1 9/16"	6.6	1/4"
03	8"	9 5/8"	5 1/2"	3/8"	3"	1'-9 5/8"	6.8	3/8"
04	8"	11 1/2"	6 5/8"	3/8"	3"	2'-0 5/8"	7.9	3/8"
05	12"	17 3/16"	13 3/8"	1/4"	2"	3'-5 9/16"	5.9	1/4"
06	19"	20"	15 3/16"	3/8"	3"	4'-4 11/16"	16.8	3/8"
07	19"	17 3/4"	13"	3/8"	3"	4'-0 1/4"	15.4	3/8"
08	19"	17 11/16"	13 1/8"	3/8"	3"	4'-0 5/16"	15.4	3/8"
09	7 1/8"	11 5/8"	9 15/16"	1/4"	2"	2'-3 3/4"	3.9	1/4"
10	12"	15 3/4"	13"	1/4"	2"	3'-3 3/4"	5.6	1/4"
11	8 3/8"	7 3/8"	3 3/4"	3/8"	3"	1'-6"	5.74	3/8"
12	8 3/8"	12 9/16"	7 5/16"	3/8"	3"	26 3/4"	8.53	3/8"
13	8 3/8"	12 1/8"	6 1/8"	3/8"	3"	25 7/8"	8.3	3/8"
14	18 3/16"	20 3/8"	15"	1/4"	2"	4'-4 9/16"	7.4	1/4"
15	19"	20 1/4"	14 13/16"	3/8"	3"	4'-4 9/16"	16.9	3/8"
16	18 3/16"	17 3/16"	12 3/8"	1/4"	2"	3'-10 7/16"	6.6	1/4"
17	19"	14 3/4"	10 3/8"	3/8"	3"	42 5/8"	13.6	3/8"
18	19"	12 9/16"	8 3/8"	3/8"	3"	38 7/16"	12.3	3/8"
19	12"	13 7/8"	10 5/16"	1/4"	3"	35 3/16"	7.47	1/4"
20	12"	10 5/8"	7 1/4"	1/4"	2"	28 7/8"	4.6	1/4"
21	20 3/16	17 3/16	12 1/4	1/4	2	48 5/8	6.9	1/4
22	20 1/2	20	15 3/16	3/8	3	54 3/16	17.3	3/8
23	8	11 11/16	6 13/16	3/8	3	25	8	3/8
24	19	22 1/4	17	1/4	2	57 1/4	8.11	1/4
25	19	23 1/4	18	3/8	3	58 3/4	18.72	3/8
26	19	20 7/8	16 3/8	3/8	3	54 3/4	17.45	3/8
27	19	19 1/4	14 5/16	3/8	3	51 1/16	16.27	3/8
(M) 28	19	19 1/8	14 1/8	1/4	2	51 1/4	7.26	1/4
(M) 29	8	11 11/16	6 13/16	3/8	2	25	5.3	3/8
(M) 30	8 3/8"	9 1/16"	5 3/8"	3/8"	2"	21 5/16"	4.5	3/8"
31	8"	11 5/8"	6 1/2"	3/8"	2"	24 15/16"	5.4	3/8"
32	19"	21 3/4"	16 1/4"	1/4"	2"	56"	7.9	1/4"
(M) 33	19"	22 1/2	17"	3/8"	3	57"	18.2	3/8"
(M) 34	19	15 3/4	10 1/2	1/4	2	44 1/4	6.27	1/4
(M) 35	19	16 5/8	11 7/16	3/8	3	45 9/16	14.5	3/8

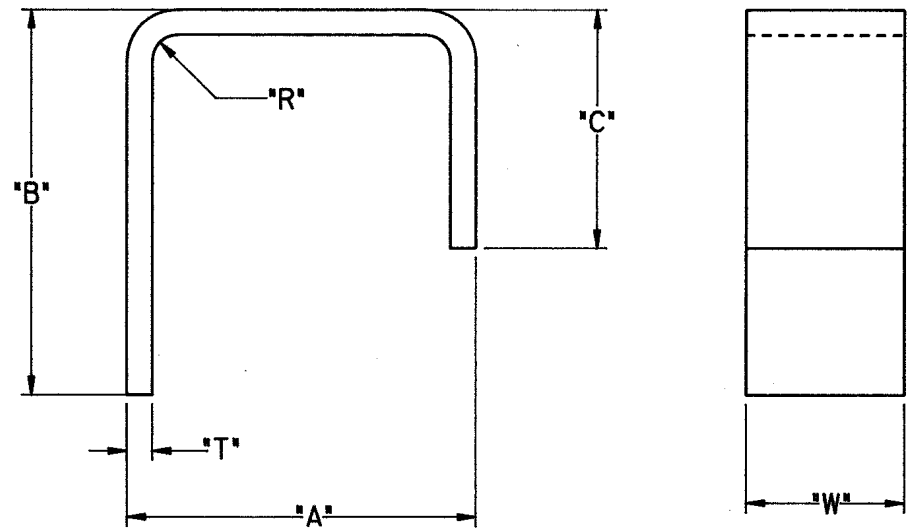

MATERIAL:

"T" X "W" X "L"
STEEL, ASTM A-569 OR A-36
LATEST REVISION

NOTES:

1. LINES ADDED TO THIS DRAWING MUST HAVE "A" DIMENSIONS THAT EXCEED "W".
2. "L" = "A" + "B" + "C" - 4"T" (WHEN "R" = "T")
3. WHEN "R" IS LARGER THAN "T" CALCULATE DIM'N. "L" ON ℄ OF "T" FOLLOWING GIVEN DIMENSIONS.

SEE 10.7.6.6

STANDARD TOLERANCES, UNLESS OTHERWISE NOTED:
FRACTIONAL DIMENSIONS + OR - 1/16"
DECIMAL DIMENSIONS + OR - .005"

THIS DRAWING IS THE SOLE PROPERTY OF PROCOR LIMITED. IT IS NOT TO BE REPRODUCED OR COPIED OR DISSEMINATED TO OTHERS.

PROCOR
PROCOR LIMITED
RAIL CAR DIVISION
2001 SPEERS RD.
OAKVILLE, ONTARIO
L6J 5E1

CHANNEL-SHAPE FORMED UNEQUAL LEGS

100716

REVISION	DATE	SCALE	WEIGHT	DRAWN	CHECKED
E	1/9/90	N.T.S.	TABLED	K.W.L.	P.Y.

E IN LINE #20, "B" WAS 12 5/16"; "C" WAS 8 15/16"; "L" WAS 32 1/4". 8/31/92 KWL

D LINE 06, DIM. "B" WAS 18 15/16". DIM. "C" WAS 13 3/4". LINE 07 DIM. "B" WAS 16 13/16". DIM. "C" WAS 12". 01.08.91 BMCG

C LINE 07, DIM. "B" WAS 18 13/16". DIM. "C" WAS 13. 01.03.91 BMCG

B LINE 01 & 02 REDUCED "B" & "C" DIM. BY 7/8". 02.13.90 PST

A REV. "T" AND "R" TO 1/4" (WAS 1/8"), REV. "L" & WT. 1/26/90 K.W.L.

(M)

FIRST USED WITH 92113

REPRO. OF -----